




# KOÇ KALIP



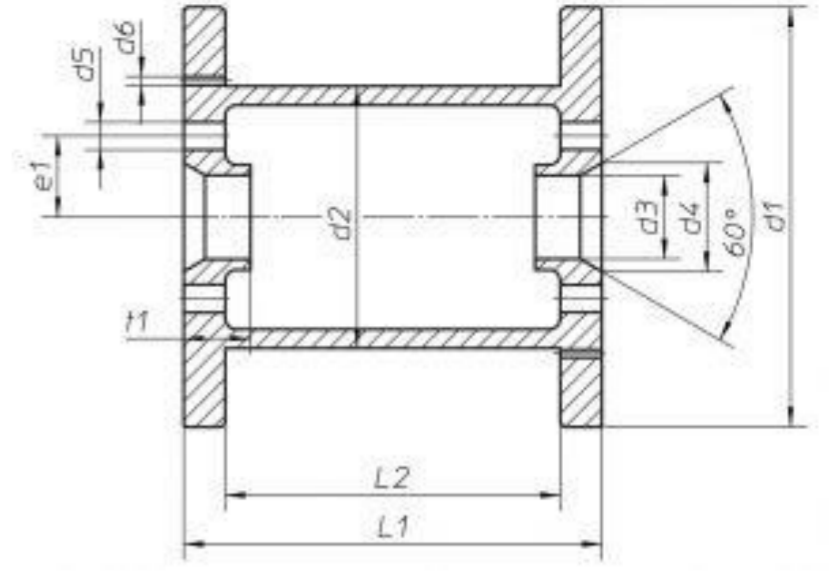


## Category D (D SERIES)








WELDING WIRE SPOOL	Loading Capacity (kg)	D1	D2	D3	L1	L2	Winding Volume (cm3)	Product Weight (ABS)
 D300 / 89.9	15	300	212	52,5	103	89,9	3.200	0,57
 D300 / 90.4	15	300	212	52,5	103	90,4	3.200	0,57
 SD300 / 84.5	20	300	180	52,5	101,6	84,5	3.850	0,63
 SD300 / 85.0	20	300	180	52,5	101,6	85	3.850	0,63
 DH300 / 15-89.9	15	300	212	52,5	103	89,9	3.200	0,57
 DH300 / 15-90.4	15	300	212	52,5	103	90,4	3.200	0,57
 DH300 / 20-89.9	20	300	180	52,5	102	89,9	4.000	0,70
 DH300 / 20-90.4	20	300	180	52,5	102	90,4	4.000	0,70
 D270 / 89.9	15	270	148	52,5	103	89,9	3.600	0,63
 D270 / 90.4	15	270	148	52,5	103	90,4	3.600	0,63
 D200 / 46.0	5	200	107	52,5	56	46	1.030	0,19







WELDING WIRE SPOOL		Loading Capacity (kg)	D1	D2	D3	L1	L2	Winding Volume (cm3)	Product Weight (ABS)
	D200 / 67.0	4	200	107	52,5	77	67	1.500	0,23
	D100 / 40.0	1	100	40	19,50	45	40	275	0,06

**Category A2**








Welding Wire Tension Rings		Loading Capacity (kg)	D1
	BC001		490
	BC002		490
	BC003		580

**Category B (K SERIES) IEC 264-2-2 (DIN 46399)**






CYLINDRICAL SPOOLS		Loading Capacity (kg)	D1	D2	D3	L1	L2	Winding Volume (cm3)	Product Weight (ABS)
	K125	3.1	125	80	16	125	100	725	0,20
	K160 / IG	7	160	85	22	160	128	1.847	0,35
	K160 / KG	7	160	100	22	160	128	1.568	0,35
	K200 / 22	15	200	125	22	200	160	3.063	0,60
	K200 / 36	15	200	125	36	200	160	3.063	0,60
	K200 / 75	15	200	125	75	200	160	3.063	0,60
	K200 / 102	15	200	125	102	200	160	3.063	0,60

CYLINDRICAL SPOOLS		Loading Capacity (kg)	D1	D2	D3	L1	L2	Winding Volume (cm3)	Product Weight (ABS)
	K250 / 22	22	250	160	22	200	160	4.637	1,05
	K250 / 36	22	250	160	36	200	160	4.637	1,05
	K250 / 75	22	250	160	75	200	160	4.637	1,05
	K250 / 102	22	250	160	102	200	160	4.637	1,05
	K250 / 127	22	250	160	127	200	160	4.637	1,05
	K355 / 36	48	355	224	36	200	160	9.531	1,85









**Category C (U SERIES)**

LIGHT WEIGHT SPOOLS		Loading Capacity (kg)	D1	D2	D3	L1	L2	Winding Volume (cm3)	Product Weight (ABS)
	U250 / 150	9	250	85	50	162	150	6.500	0,22
	U250 / 200	11	250	85	50	212	200	8.677	0,25
	U250 / 250	13	250	85	50	262	250	10.800	0,28
	U300 / 150	10	300	85	50	162	150	9.500	0,30
	U300 / 200	12	300	85	50	212	200	12.800	0,33
	U300 / 250	14	300	85	50	262	250	16.000	0,36
	U250 / L100	5	250	50	30	112	100	5.000	0,25










LIGHT WEIGHT SPOOLS		Loading Capacity (kg)	D1	D2	D3	L1	L2	Winding Volume (cm3)	Product Weight (ABS)
	U250 / L200	7	250	50	30	212	200	10.000	0,28
	U250 / L300	9	250	50	30	312	300	20.000	0,31
	U300 / L100	6	300	50	30	112	100	7.500	0,28
	U300 / L200	8	300	50	30	212	200	15.000	0,31
	U300 / L300	10	300	50	30	312	300	30.000	0,34

**Category D (D SERIES)**


FINE AND ALUMINIUM WIRESPOOLS		Loading Capacity (kg)	D1	D2	D3	L1	L2	Winding Volume (cm3)	Product Weight (ABS)
	D60 / 40	0,25	60	38,5	16	45	41,5	70	0,020
	D65 / 10	0,10	65	36	19,5	18.1	10	35	0,015
	D65 / 20	0,25	65	36	19,5	28.1	20	70	0,025
	D65 / 40	0,50	65	36	19,5	57	49	170	0,033
	D80 / 40	0,50	80	38,5	16	45	41.5	210	0,040
	D100 / 40	1,00	100	40	19,5	45	40	275	0,060
	D135 / 43	2,00	135	57	19,5	49	43	505	0,100
	D155 / 43-D80	2,50	155	80	19,5	49	43	630	0,125

FINE AND ALUMINIUM WIREPOOLS	Loading Capacity (kg)	D1	D2	D3	L1	L2	Winding Volume (cm3)	Product Weight (ABS)	
	D155 / 43	3	155	57	19,5	49	43	760	0,135
	D155 / 58	4	155	57	19,5	64	58	1.010	0,145
	D200 / 67.0 3D SPOOL	1	200	107	52,5	77	67	1.500	0,23
	D265 / 200	20	265	80	30	200	188	16.000	0,60
	D305 / 68	8	305	125	38,5	78	68	4.068	0,57
	D320 / 58	8,5	320	120	52,5	67	58	3.950	0,75
	D320 / 68	10	320	120	52,5	79	68	4.630	0,78
	D320 / L250	25	320	125	52,5	259	250	25.000	1,20
	D320 / L350	35	320	125	52,5	359	350	35.000	1,50
	D360	12	360	84	52,5	69,5	57,5	5.400	1,00
	D360 / L200	20	360	95	52,5	210	200	15.000	1,40
	D360 / L300	25	360	95	52,5	310	300	20.000	1,70
	K355F / L310	90	355	232	127	350	310	16.700	2,50

**Category E (DY SERIES)**

YARN REELS & BOBBINS		Loading Capacity (kg)	D1	D2	D3	L1	L2	Winding Volume (cm3)	Product Weight (ABS)
	DY85 / 80	0,25	85	30	25	83,5	78	290	0,030
	DY90 / 130	0,50	90	30	25	130	125	700	0,055
	DY120 / 130	1	120	30	25	130	125	1.300	0,070
	DY140 / 130	1,75	140	30	25	130	125	1.800	0,090
	DY147 / 130	2	147	30	25	130	125	2.030	0,096
	DY165 / 130	2,50	165	30	25	130	125	2.500	0,120
	BOBBIN 80/140	3,50	80	30	25	140			0,027

**Category F**

BRAIDING SPOOLS		Loading Capacity (kg)	D1	D2	D3	L1	L2	Winding Volume (cm3)	Product Weight (ABS)
	SPI 80/10-100S	0,2	80	30	16	100	80	368	0,12